


MB*-02, 03, 04, 06 系列

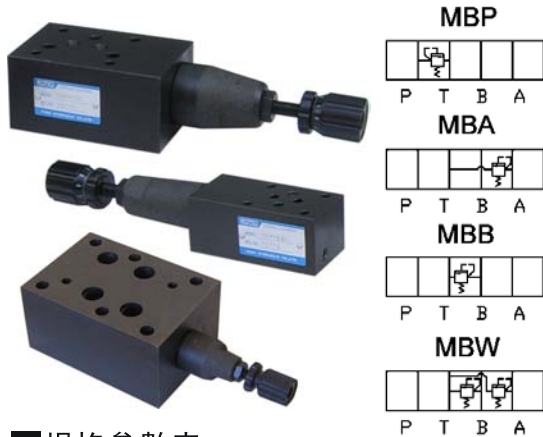

■ 型號說明


MB	P	-02	-B	-M
系列編號	控制油路	規格	開啓壓力	把手型式
疊加式溢流閥	P: P 油路 A: A 油路 B: B 油路 W: A、B 油路	01: 1/8 02: 1/4 03: 3/8 04: 1/2 06: 3/4	請參照規格參數表	M: 塑膠把手 H: 內六角螺栓 06 僅用六角型螺栓

備註：標準把手在 B 孔側。

■ 規格參數表



型號	最高使用壓力 MPa	開啓壓力 MPa	最大流量 L/min	重量 Kg
MBP-01	25	B: 0.8-7 C: 1.0-14 H: 1.5-25	01: 2 02: 40 03: 80 04: 150 06: 200	1.5
MBP-02				1.5
MBP-03				3.3
MBP-04				7.0
MBP-06				11.5
MBA-01				1.2
MBA-02				1.5
MBA-03				3.3
MBA-04				7.0
MBA-06				11.5
MBB-01				1.2
MBB-02				1.4
MBB-03				3.3
MBB-04				7.0
MBB-06				11.5
MBW-01				1.2
MBW-02				2.3
MBW-03				3.9

■ 尺寸圖


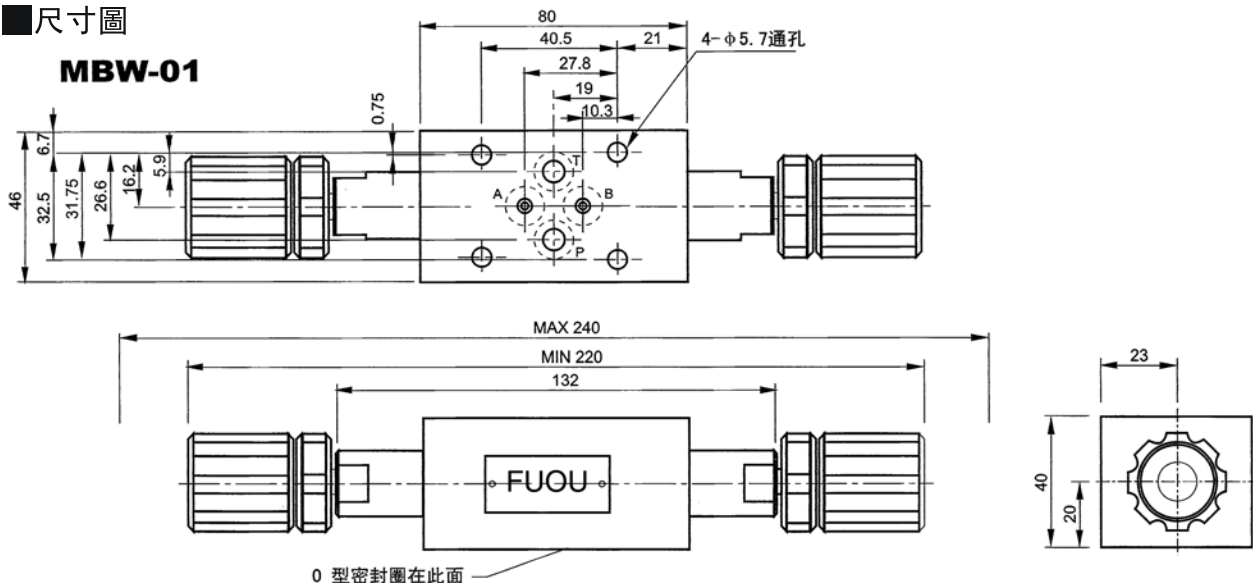


尺寸圖

MBP-02
MBA-02
MBB-02

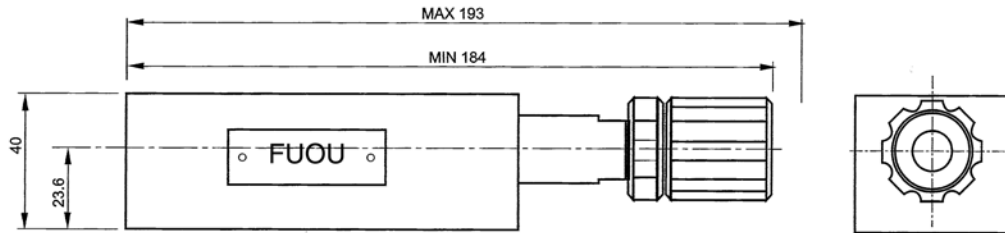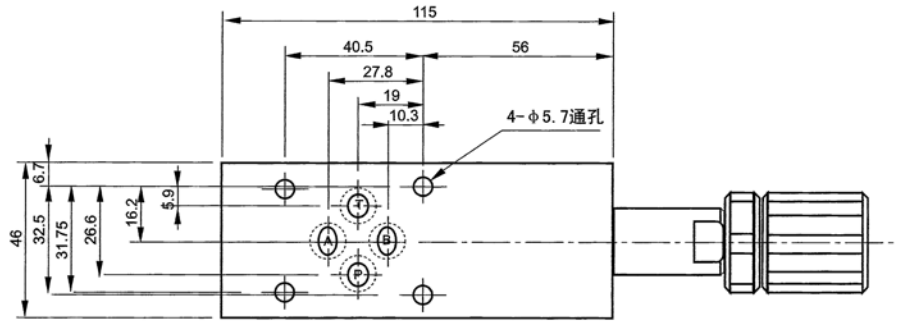


MBW-02

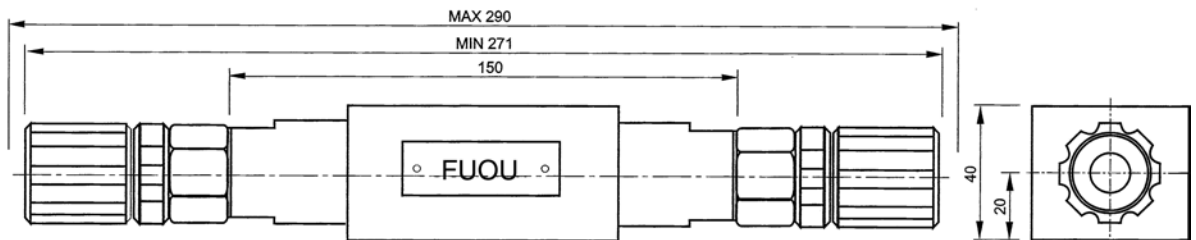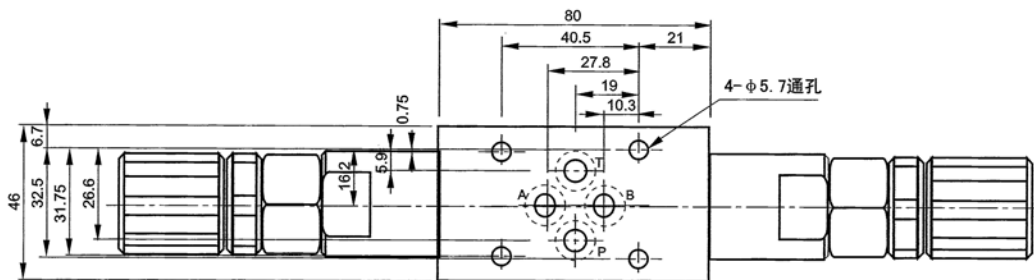


尺寸圖


MBP-03 MBA-03 MBB-03

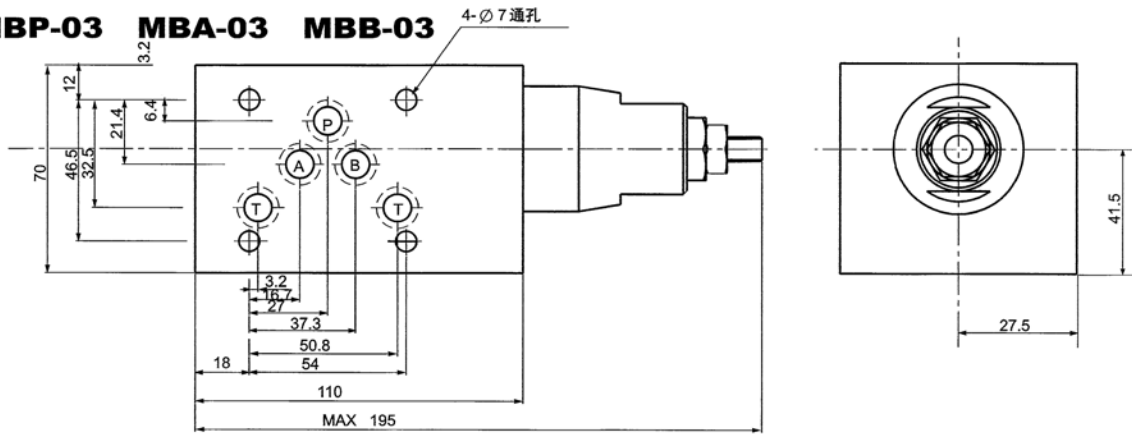

MBW-03




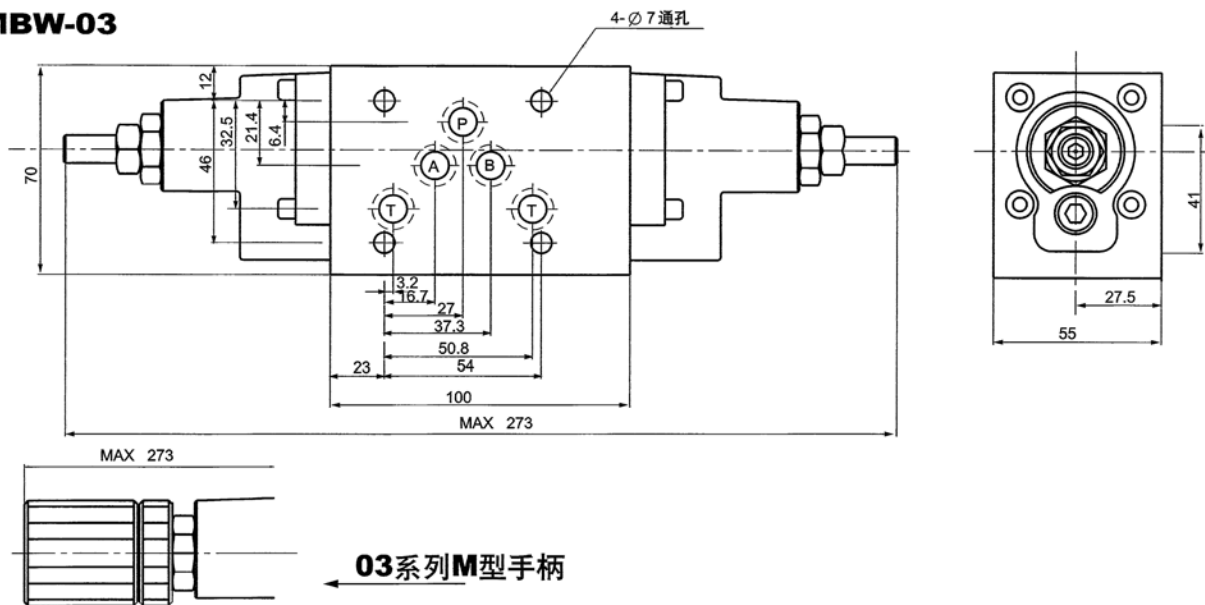


MBP-06 MBA-06 MBB-06

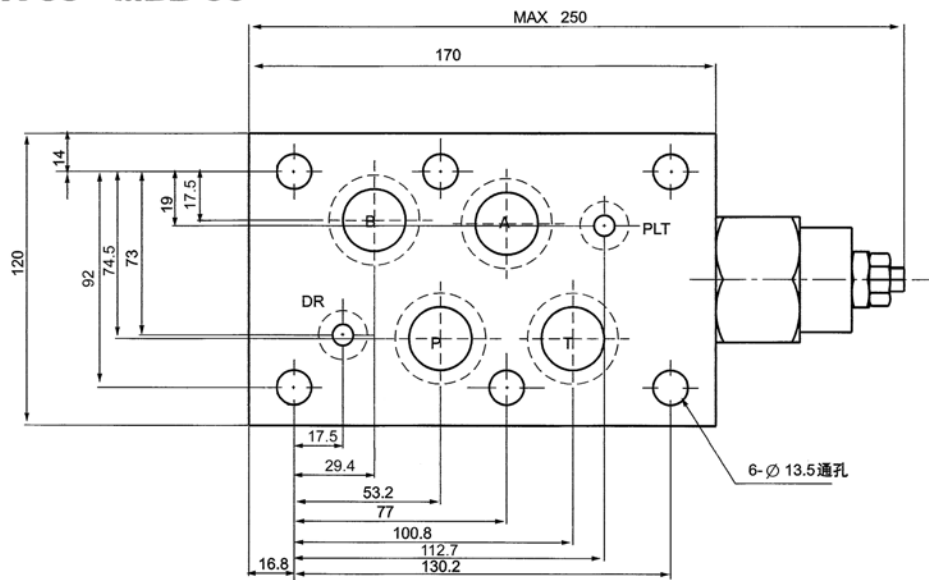


性能曲線 測試條件：油粘度：32cSt 油溫：50℃ 油：ISO-VG32 比重：0.85

A.最低調整壓力-流量特性

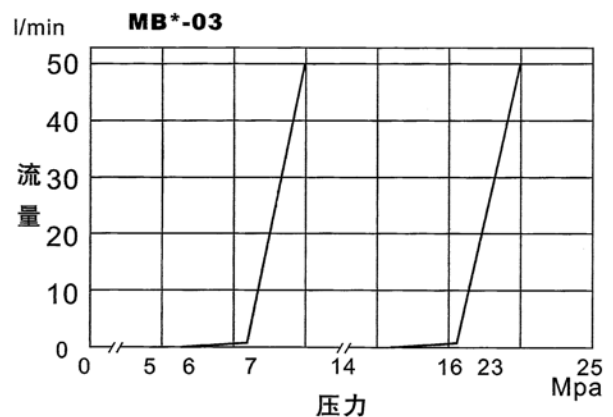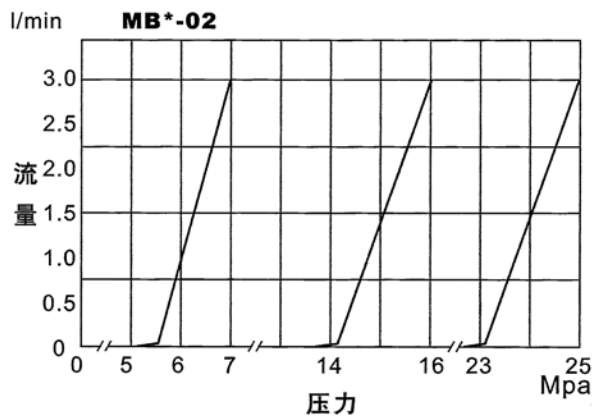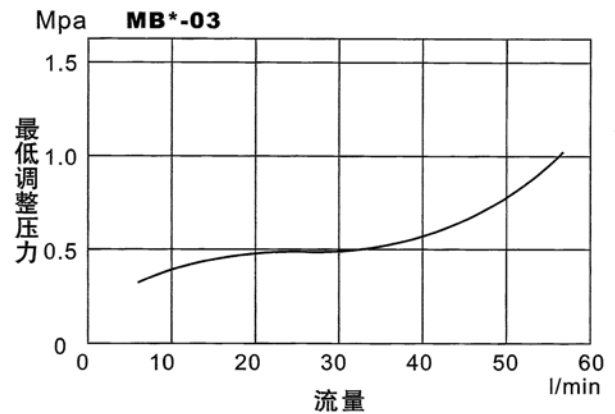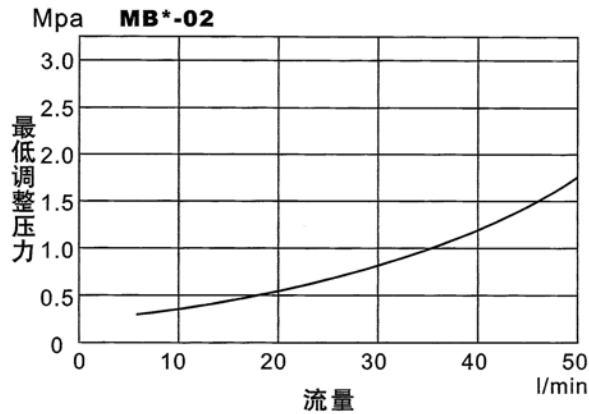


剖面圖

MB*-02

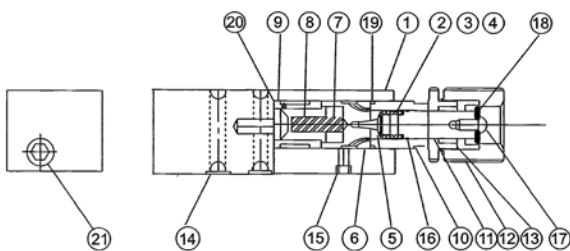

MB*-03

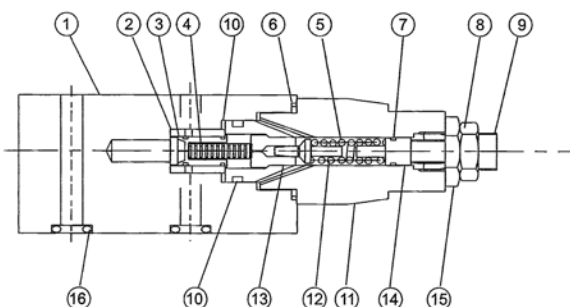

MB*-02

編號	零件名稱	數量
1	閥體	1
2	彈簧-1(任選)	1
3	彈簧-2(任選)	1
4	彈簧-3(任選)	1
5	針閥	1
6	閥座	1
7	彈簧-4	1
8	閥芯	1
9	活動體	1
10	調整黑頭	1
11	調整螺栓	1
12	微調蓋	1
13	微調	1
14	O型圈-1	4
15	內六角堵頭	2
16	O型圈-2	1
17	圓頭螺釘	1
18	平墊圈	1
19	O型圈-3	1
20	O型圈-4	1
21	內六角堵頭	1

MB*-03

編號	零件名稱	數量
1	閥體	1
2	閥座	1
3	閥芯	1
4	彈簧-1	1
5	彈簧-2	1
6	O型圈-3	1
7	O型圈-4	1
8	六角螺帽	1
9	固定螺栓	1
10	O型圈-5	1
11	調壓閥	1
12	針閥	1
13	閥座	1
14	推杆	4
15	黑頭	2
16	O型圈-6	1